



### LED 110W Single point blinder

The **B Blinded1** is the first real LED single point blinder on the AV market.

Created as the little brother of the B Blinded, it has the same functionality, feel and tungsten emulation as its big bro

The **B Blinded1** can be used as a permanent warm wash light- as well as a strobe fixture.


Being IP65 rated, compact & low weight and with an extreme high output due to the use of glass optics,

the B Blinded1 is the perfect "tool" in your rental fleet of mid class lighting fixtures.

The true replacement of the DWE Par38 !

### PHYSICAL

Dimensions	247 x 234 x 150 mm
Bracket	232 mm
Packing dimensions	400 x 300 x 220
Nett weight	3,5Kg
Gross weight	3,8kg

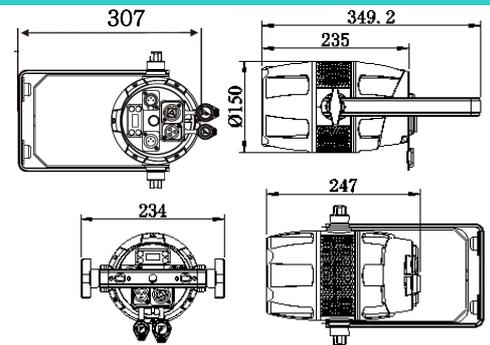

### MOUNTING OPTIONS

- Hanging: 1 omega bracket with 2x 1/4 turn quick-lock fasteners  
1x M12 hole in the middle of the omega bracket
- Standing double bracket; adjustable opening angle


2nd suspension/ safety wire: use the double bracket to sling the safety wire or carbinier

### CONTROL

Menu control via OLED display with 4 buttons	In/Link: XLR 5-pin
control	dmx512, manual, RDM
DMX mode	1/2/4 ch
Dimmer mode:	0 ~100% 8 or 16bit mode
Strobe	adjustable speed + random

### OPTICAL

led sources	CREE LED
beam angle	50°
light output	540 Lux @ 4m
CRI	81,9 CRI
colour temperature	2700 °K - 1200 in Tungsten mode
Tungsten mode :	Red is mixed @ low light levels
colours	warm white + red
dim speed	fast , smooth or under

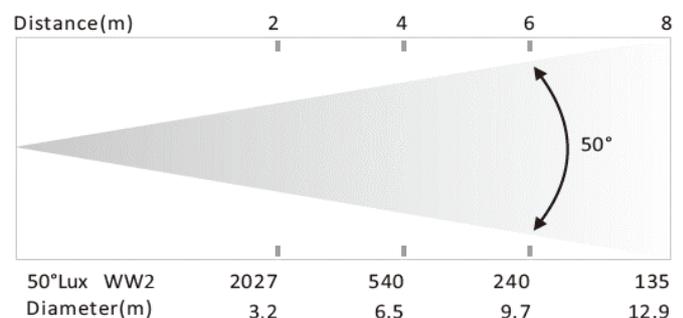


### ELECTRICAL

fixture rated power	115W	input power 100 - 240V~ 50/60Hz Auto switching power supply
LED engine	125W flickerfree	In/ Link PowerCON TRUE1 - max link current 10A
refresh rate	1200hz	

## CONNECTIVITY

- 1 Display & Button
- 2 Through the air valve
- 3 DMX input/output
- 4 Mains inout/output

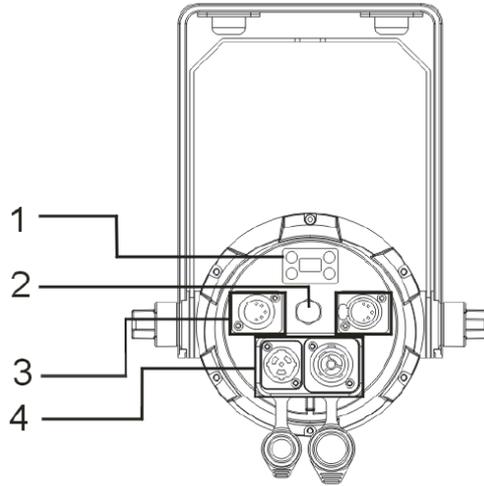

## ACCESORIES

Included  
Powercable

Omega Bracket with 2x 1/4 turn quick-lock fastners

## ENVIRONMENTAL

IP Rating  
cooling

IP65  
very low noise: 38dB @ 1m  
temperature controlled fan