





B BLAST & B BLAST PRO DMX Chart

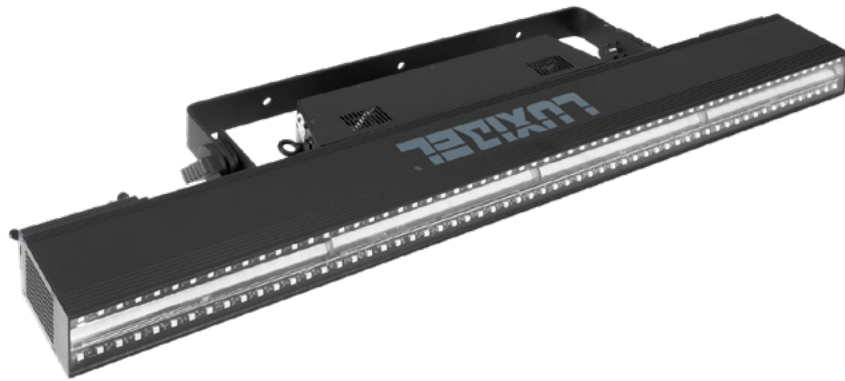

7 DMX modes

- 5-Channel mode
- 10-Channel mode
- 36-Channel mode
- 52-Channel mode
- 126-Channel mode
- 390-Channel mode
- 400-Channel mode

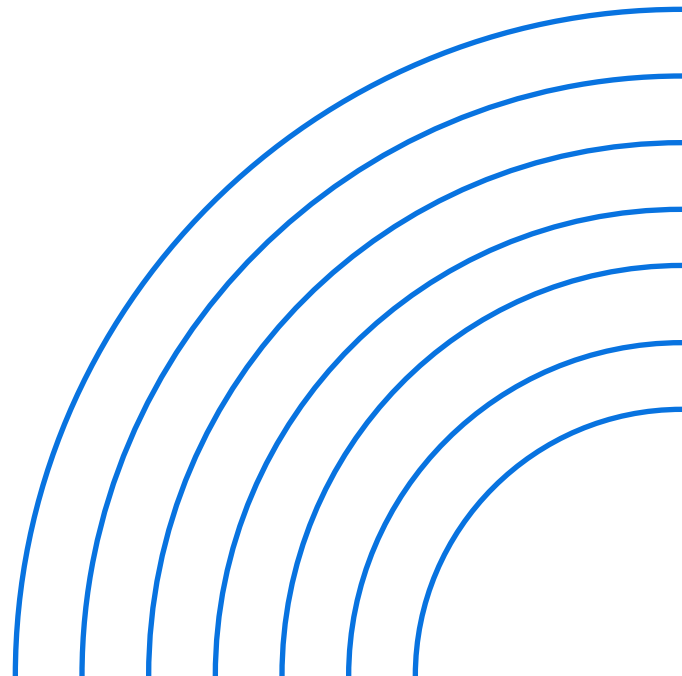

5-Channel mode

Channel	Name	Function	Min DMX	Max DMX
1	Dimmer	Coarse Dimmer	0	255
2	ALL LEDS	Strobe CW + RGB	0	255
3	CW Macros	CW Macro 1	0	15
		CW Macro 2	16	30
		CW Macro 3	31	45
		CW Macro 4	46	60
		CW Macro 5	61	75
		CW Macro 6	76	90
		CW Macro 7	91	105
		CW Macro 8	106	120
		CW Macro 9	121	135
		CW Macro 10	136	150
		CW Macro 11	151	165
		CW Macro 12	166	180
		CW Macro 13	181	195
		CW Macro 14	196	210
		CW Macro 15	211	225
		CW Macro 16	226	240
		CW Macro 17	241	255
4	RGB Macros	RGB Macro 1	0	15
		RGB Macro 2	16	30
		RGB Macro 3	31	45
		RGB Macro 4	46	60
		RGB Macro 5	61	75
		RGB Macro 6	76	90
		RGB Macro 7	91	105
		RGB Macro 8	106	120

5-Channel mode

Channel	Name	Function	Min DMX	Max DMX
4	RGB Macros	RGB Macro 9	121	135
		RGB Macro 10	136	150
		RGB Macro 11	151	165
		RGB Macro 12	166	180
		RGB Macro 13	181	195
		RGB Macro 14	196	210
		RGB Macro 15	211	225
		RGB Macro 16	226	240
		RGB Macro 17	241	255
5	Macro Speed	Slow - Fast	0	255

10-Channel mode

Channel	Name	Function	Min DMX	Max DMX
1	Dimmer	Coarse Dimmer	0	255
2	Strobe CW	No Function	0	5
		Sync. Strobe	6	55
		Pulse Strobe	56	105
		Random Strobe	106	155
		Gradual fade in (Fast-Slow)	156	205
		Gradual fade out (Fast-Slow)	206	255
3	Strobe RGB	No Function	0	5
		Sync. Strobe	6	55
		Pulse Strobe	56	105
		Random Strobe	106	155

10-Channel mode

Channel	Name	Function	Min DMX	Max DMX
3	Strobe RGB	Gradual fade in (Fast-Slow)	156	205
		Gradual fade out (Fast-Slow)	206	255
4	Red	Red 0-100%	0	255
5	Green	Green 0-100%	0	255
6	Blue	Blue 0-100%	0	255
7	Dimmer	Dimmer CW LEDS	0	255
8	CW Macros	CW Macro 1	0	15
		CW Macro 2	16	30
		CW Macro 3	31	45
		CW Macro 4	46	60
		CW Macro 5	61	75
		CW Macro 6	76	90
		CW Macro 7	91	105
		CW Macro 8	106	120
		CW Macro 9	121	135
		CW Macro 10	136	150
		CW Macro 11	151	165
		CW Macro 12	166	180
		CW Macro 13	181	195
		CW Macro 14	196	210
		CW Macro 15	211	225
		CW Macro 16	226	240
		CW Macro 17	241	255
9	RGB Macros	RGB Macro 1	0	15
		RGB Macro 2	16	30
		RGB Macro 3	31	45

10-Channel mode

Channel	Name	Function	Min DMX	Max DMX
9	RGB Macros	RGB Macro 4	46	60
		RGB Macro 5	61	75
		RGB Macro 6	76	90
		RGB Macro 7	91	105
		RGB Macro 8	106	120
		RGB Macro 9	121	135
		RGB Macro 10	136	150
		RGB Macro 11	151	165
		RGB Macro 12	166	180
		RGB Macro 13	181	195
		RGB Macro 14	196	210
		RGB Macro 15	211	225
		RGB Macro 16	226	240
		RGB Macro 17	241	255
10	Macro Speed	Slow - Fast	0	255

36-Channel mode

Channel	Name	Function	Min DMX	Max DMX
1	Dimmer	Coarse Dimmer	0	255
2	Strobe CW	No Function	0	5
		Sync. Strobe	6	55
		Pulse Strobe	56	105
		Random Strobe	106	155
		Gradual fade in (Fast-Slow)	156	205
		Gradual fade out (Fast-Slow)	206	255
3	Strobe RGB	No Function	0	5
		Sync. Strobe	6	55
		Pulse Strobe	56	105
		Random Strobe	106	155
		Gradual fade in (Fast-Slow)	156	205
		Gradual fade out (Fast-Slow)	206	255
4	CW Macros	CW Macro 1	0	15
		CW Macro 2	16	30
		CW Macro 3	31	45
		CW Macro 4	46	60
		CW Macro 5	61	75
		CW Macro 6	76	90
		CW Macro 7	91	105
		CW Macro 8	106	120
		CW Macro 9	121	135
		CW Macro 10	136	150
		CW Macro 11	151	165
		CW Macro 12	166	180

36-Channel mode

Channel	Name	Function	Min DMX	Max DMX
4	CW Macros	CW Macro 13	181	195
		CW Macro 14	196	210
		CW Macro 15	211	225
		CW Macro 16	226	240
		CW Macro 17	241	255
5	RGB Macros	RGB Macro 1	0	15
		RGB Macro 2	16	30
		RGB Macro 3	31	45
		RGB Macro 4	46	60
		RGB Macro 5	61	75
		RGB Macro 6	76	90
		RGB Macro 7	91	105
		RGB Macro 8	106	120
		RGB Macro 9	121	135
		RGB Macro 10	136	150
		RGB Macro 11	151	165
		RGB Macro 12	166	180
		RGB Macro 13	181	195
		RGB Macro 14	196	210
		RGB Macro 15	211	225
		RGB Macro 16	226	240
		RGB Macro 17	241	255
6	Macro Speed	Slow - Fast	0	255
7	LED Segment	CW Segment 1	0	255
8	LED Segment	CW Segment 2	0	255
9	LED Segment	CW Segment 3	0	255
10	LED Segment	CW Segment 4	0	255

36-Channel mode

Channel	Name	Function	Min DMX	Max DMX
11	LED Segment	CW Segment 5	0	255
12	LED Segment	CW Segment 6	0	255
13	LED Segment	CW Segment 7	0	255
14	LED Segment	CW Segment 8	0	255
15	LED Segment	CW Segment 9	0	255
16	LED Segment	CW Segment 10	0	255
17	LED Segment	CW Segment 11	0	255
18	LED Segment	CW Segment 12	0	255
19	LED Segment	CW Segment 13	0	255
20	LED Segment	CW Segment 14	0	255
21	LED Segment	CW Segment 15	0	255
22	LED Segment	CW Segment 16	0	255
23	LED Segment	CW Segment 17	0	255
24	LED Segment	CW Segment 18	0	255
25	LED Segment	CW Segment 19	0	255
26	LED Segment	CW Segment 20	0	255
27	LED Segment	CW Segment 21	0	255
28	LED Segment	CW Segment 22	0	255
29	LED Segment	CW Segment 23	0	255
30	LED Segment	CW Segment 24	0	255
31	LED Segment	CW Segment 25	0	255
32	LED Segment	CW Segment 26	0	255
33	LED Segment	CW Segment 27	0	255
34	LED Segment	CW Segment 28	0	255
35	LED Segment	CW Segment 29	0	255
36	LED Segment	CW Segment 30	0	255

52-Channel mode

Channel	Name	Function	Min DMX	Max DMX
1	Dimmer	Coarse Dimmer	0	255
2	Strobe CW	No Function	0	5
		Sync. Strobe	6	55
		Pulse Strobe	56	105
		Random Strobe	106	155
		Gradual fade in (Fast-Slow)	156	205
		Gradual fade out (Fast-Slow)	206	255
3	Strobe RGB	No Function	0	5
		Sync. Strobe	6	55
		Pulse Strobe	56	105
		Random Strobe	106	155
		Gradual fade in (Fast-Slow)	156	205
		Gradual fade out (Fast-Slow)	206	255
4	Red	Red 0-100%	0	255
5	Green	Green 0-100%	0	255
6	Blue	Blue 0-100%	0	255
7	Dimmer	Dimmer CW LEDS	0	255
8	RGB Macros	RGB Macro 1	0	15
		RGB Macro 2	16	30
		RGB Macro 3	31	45
		RGB Macro 4	46	60
		RGB Macro 5	61	75
		RGB Macro 6	76	90
		RGB Macro 7	91	105
		RGB Macro 8	106	120

52-Channel mode

Channel	Name	Function	Min DMX	Max DMX
8	RGB Macros	RGB Macro 9	121	135
		RGB Macro 10	136	150
		RGB Macro 11	151	165
		RGB Macro 12	166	180
		RGB Macro 13	181	195
		RGB Macro 14	196	210
		RGB Macro 15	211	225
		RGB Macro 16	226	240
		RGB Macro 17	241	255
9	CW Macros	CW Macro 1	0	15
		CW Macro 2	16	30
		CW Macro 3	31	45
		CW Macro 4	46	60
		CW Macro 5	61	75
		CW Macro 6	76	90
		CW Macro 7	91	105
		CW Macro 8	106	120
		CW Macro 9	121	135
		CW Macro 10	136	150
		CW Macro 11	151	165
		CW Macro 12	166	180
		CW Macro 13	181	195
		CW Macro 14	196	210
		CW Macro 15	211	225
		CW Macro 16	226	240
		CW Macro 17	241	255

52-Channel mode

10	Macro Speed	Slow - Fast	0	255
Channel	Name	Function	Min DMX	Max DMX
11	LED Segment	CW Segment 1-5	0	255
12	LED Segment	CW Segment 6-10	0	255
13	LED Segment	CW Segment 11-15	0	255
14	LED Segment	CW Segment 16-20	0	255
15	LED Segment	CW Segment 21-25	0	255
16	LED Segment	CW Segment 26-30	0	255
17	LED Segment	Red Segment 1-10	0	255
18	LED Segment	Green Segment 1-10	0	255
19	LED Segment	Blue Segment 1-10	0	255
20	LED Segment	Red Segment 11-20	0	255
21	LED Segment	Green Segment 11-20	0	255
22	LED Segment	Blue Segment 11-20	0	255
23	LED Segment	Red Segment 21-30	0	255
24	LED Segment	Green Segment 21-30	0	255
25	LED Segment	Blue Segment 21-30	0	255
26	LED Segment	Red Segment 31-40	0	255
27	LED Segment	Green Segment 31-40	0	255
28	LED Segment	Blue Segment 31-40	0	255
29	LED Segment	Red Segment 41-50	0	255
30	LED Segment	Green Segment 41-50	0	255
31	LED Segment	Blue Segment 41-50	0	255
32	LED Segment	Red Segment 51-60	0	255
33	LED Segment	Green Segment 51-60	0	255

52-Channel mode

Channel	Name	Function	Min DMX	Max DMX
34	LED Segment	Blue Segment 51-60	0	255
35	LED Segment	Red Segment 61-70	0	255
36	LED Segment	Green Segment 61-70	0	255
37	LED Segment	Blue Segment 61-70	0	255
38	LED Segment	Red Segment 71-80	0	255
39	LED Segment	Green Segment 71-80	0	255
40	LED Segment	Blue Segment 71-80	0	255
41	LED Segment	Red Segment 81-90	0	255
42	LED Segment	Green Segment 81-90	0	255
43	LED Segment	Blue Segment 81-90	0	255
44	LED Segment	Red Segment 91-100	0	255
45	LED Segment	Green Segment 91-100	0	255
46	LED Segment	Blue Segment 91-100	0	255
47	LED Segment	Red Segment 101-110	0	255
48	LED Segment	Green Segment 101-110	0	255
49	LED Segment	Blue Segment 101-110	0	255
50	LED Segment	Red Segment 111-120	0	255
51	LED Segment	Green Segment 111-120	0	255
52	LED Segment	Blue Segment 111-120	0	255

126-Channel mode

Channel	Name	Function	Min DMX	Max DMX
1	Dimmer	Coarse Dimmer	0	255
2	Strobe CW	No Function	0	5
		Sync. Strobe	6	55
		Pulse Strobe	56	105
		Random Strobe	106	155
		Gradual fade in (Fast-Slow)	156	205
		Gradual fade out (Fast-Slow)	206	255
3	Strobe RGB	No Function	0	5
		Sync. Strobe	6	55
		Pulse Strobe	56	105
		Random Strobe	106	155
		Gradual fade in (Fast-Slow)	156	205
		Gradual fade out (Fast-Slow)	206	255
4	RGB Macros	RGB Macro 1	0	15
		RGB Macro 2	16	30
		RGB Macro 3	31	45
		RGB Macro 4	46	60
		RGB Macro 5	61	75
		RGB Macro 6	76	90
		RGB Macro 7	91	105
		RGB Macro 8	106	120
		RGB Macro 9	121	135
		RGB Macro 10	136	150
		RGB Macro 11	151	165
		RGB Macro 12	166	180
		RGB Macro 13	181	195

126-Channel mode

Channel	Name	Function	Min DMX	Max DMX
4	RGB Macros	RGB Macro 14	196	210
		RGB Macro 15	211	225
		RGB Macro 16	226	240
		RGB Macro 17	241	255
5	CW Macros	CW Macro 1	0	15
		CW Macro 2	16	30
		CW Macro 3	31	45
		CW Macro 4	46	60
		CW Macro 5	61	75
		CW Macro 6	76	90
		CW Macro 7	91	105
		CW Macro 8	106	120
		CW Macro 9	121	135
		CW Macro 10	136	150
		CW Macro 11	151	165
		CW Macro 12	166	180
		CW Macro 13	181	195
		CW Macro 14	196	210
		CW Macro 15	211	225
		CW Macro 16	226	240
		CW Macro 17	241	255
6	Macro Speed	Slow - Fast	0	255
7	LED Segment	Red Segment 1	0	255
8	LED Segment	Green Segment 1	0	255
9	LED Segment	Blue Segment 1	0	255
10	LED Segment	CW Segment 1	0	255
11	LED Segment	Red Segment 2	0	255

126-Channel mode

Channel	Name	Function	Min DMX	Max DMX
12	LED Segment	Green Segment 2	0	255
13	LED Segment	Blue Segment 2	0	255
14	LED Segment	CW Segment 2	0	255
15	LED Segment	Red Segment 3	0	255
16	LED Segment	Green Segment 3	0	255
17	LED Segment	Blue Segment 3	0	255
18	LED Segment	CW Segment 3	0	255
19	LED Segment	Red Segment 4	0	255
20	LED Segment	Green Segment 4	0	255
21	LED Segment	Blue Segment 4	0	255
22	LED Segment	CW Segment 4	0	255
23	LED Segment	Red Segment 5	0	255
24	LED Segment	Green Segment 5	0	255
25	LED Segment	Blue Segment 5	0	255
26	LED Segment	CW Segment 5	0	255
27	LED Segment	Red Segment 6	0	255
28	LED Segment	Green Segment 6	0	255
29	LED Segment	Blue Segment 6	0	255
30	LED Segment	CW Segment 6	0	255
31	LED Segment	Red Segment 7	0	255
32	LED Segment	Green Segment 7	0	255
33	LED Segment	Blue Segment 7	0	255
34	LED Segment	CW Segment 7	0	255
35	LED Segment	Red Segment 8	0	255
36	LED Segment	Green Segment 8	0	255
37	LED Segment	Blue Segment 8	0	255
38	LED Segment	CW Segment 8	0	255

126-Channel mode

Channel	Name	Function	Min DMX	Max DMX
39	LED Segment	Red Segment 9	0	255
40	LED Segment	Green Segment 9	0	255
41	LED Segment	Blue Segment 9	0	255
42	LED Segment	CW Segment 9	0	255
43	LED Segment	Red Segment 10	0	255
44	LED Segment	Green Segment 10	0	255
45	LED Segment	Blue Segment 10	0	255
46	LED Segment	CW Segment 10	0	255
47	LED Segment	Red Segment 11	0	255
48	LED Segment	Green Segment 11	0	255
49	LED Segment	Blue Segment 11	0	255
50	LED Segment	CW Segment 11	0	255
51	LED Segment	Red Segment 12	0	255
52	LED Segment	Green Segment 12	0	255
53	LED Segment	Blue Segment 12	0	255
54	LED Segment	CW Segment 12	0	255
55	LED Segment	Red Segment 13	0	255
56	LED Segment	Green Segment 13	0	255
57	LED Segment	Blue Segment 13	0	255
58	LED Segment	CW Segment 13	0	255
59	LED Segment	Red Segment 14	0	255
60	LED Segment	Green Segment 14	0	255
61	LED Segment	Blue Segment 14	0	255
62	LED Segment	CW Segment 14	0	255
63	LED Segment	Red Segment 15	0	255
64	LED Segment	Green Segment 15	0	255
65	LED Segment	Blue Segment 15	0	255

126-Channel mode

Channel	Name	Function	Min DMX	Max DMX
66	LED Segment	CW Segment 15	0	255
67	LED Segment	Red Segment 16	0	255
68	LED Segment	Green Segment 16	0	255
69	LED Segment	Blue Segment 16	0	255
70	LED Segment	CW Segment 16	0	255
71	LED Segment	Red Segment 17	0	255
72	LED Segment	Green Segment 17	0	255
73	LED Segment	Blue Segment 17	0	255
74	LED Segment	CW Segment 17	0	255
75	LED Segment	Red Segment 18	0	255
76	LED Segment	Green Segment 18	0	255
77	LED Segment	Blue Segment 18	0	255
78	LED Segment	CW Segment 18	0	255
79	LED Segment	Red Segment 19	0	255
80	LED Segment	Green Segment 19	0	255
81	LED Segment	Blue Segment 19	0	255
82	LED Segment	CW Segment 19	0	255
83	LED Segment	Red Segment 20	0	255
84	LED Segment	Green Segment 20	0	255
85	LED Segment	Blue Segment 20	0	255
86	LED Segment	CW Segment 20	0	255
87	LED Segment	Red Segment 21	0	255
88	LED Segment	Green Segment 21	0	255
89	LED Segment	Blue Segment 21	0	255
90	LED Segment	CW Segment 21	0	255
91	LED Segment	Red Segment 22	0	255
92	LED Segment	Green Segment 22	0	255

126-Channel mode

Channel	Name	Function	Min DMX	Max DMX
93	LED Segment	Blue Segment 22	0	255
94	LED Segment	CW Segment 22	0	255
95	LED Segment	Red Segment 23	0	255
96	LED Segment	Green Segment 23	0	255
97	LED Segment	Blue Segment 23	0	255
98	LED Segment	CW Segment 23	0	255
99	LED Segment	Red Segment 24	0	255
100	LED Segment	Green Segment 24	0	255
101	LED Segment	Blue Segment 24	0	255
102	LED Segment	CW Segment 24	0	255
103	LED Segment	Red Segment 25	0	255
104	LED Segment	Green Segment 25	0	255
105	LED Segment	Blue Segment 25	0	255
106	LED Segment	CW Segment 25	0	255
107	LED Segment	Red Segment 26	0	255
108	LED Segment	Green Segment 26	0	255
109	LED Segment	Blue Segment 26	0	255
110	LED Segment	CW Segment 26	0	255
111	LED Segment	Red Segment 27	0	255
112	LED Segment	Green Segment 27	0	255
113	LED Segment	Blue Segment 27	0	255
114	LED Segment	CW Segment 27	0	255
115	LED Segment	Red Segment 28	0	255
116	LED Segment	Green Segment 28	0	255
117	LED Segment	Blue Segment 28	0	255
118	LED Segment	CW Segment 28	0	255

126-Channel mode

Channel	Name	Function	Min DMX	Max DMX
119	LED Segment	Red Segment 29	0	255
120	LED Segment	Green Segment 29	0	255
121	LED Segment	Blue Segment 29	0	255
122	LED Segment	CW Segment 29	0	255
123	LED Segment	Red Segment 30	0	255
124	LED Segment	Green Segment 30	0	255
125	LED Segment	Blue Segment 30	0	255
126	LED Segment	CW Segment 30	0	255

390-Channel mode

Channel	Name	Function	Min DMX	Max DMX
1	LED Segment	CW Segment 1	0	255
2	LED Segment	CW Segment 2	0	255
3	LED Segment	CW Segment 3	0	255
4	LED Segment	CW Segment 4	0	255
5	LED Segment	CW Segment 5	0	255
6	LED Segment	CW Segment 6	0	255
7	LED Segment	CW Segment 7	0	255
8	LED Segment	CW Segment 8	0	255
9	LED Segment	CW Segment 9	0	255
10	LED Segment	CW Segment 10	0	255
11	LED Segment	CW Segment 11	0	255
12	LED Segment	CW Segment 12	0	255
13	LED Segment	CW Segment 13	0	255
14	LED Segment	CW Segment 14	0	255
15	LED Segment	CW Segment 15	0	255
16	LED Segment	CW Segment 16	0	255
17	LED Segment	CW Segment 17	0	255
18	LED Segment	CW Segment 18	0	255
19	LED Segment	CW Segment 19	0	255
20	LED Segment	CW Segment 20	0	255
21	LED Segment	CW Segment 21	0	255
22	LED Segment	CW Segment 22	0	255
23	LED Segment	CW Segment 23	0	255
24	LED Segment	CW Segment 24	0	255
25	LED Segment	CW Segment 25	0	255
26	LED Segment	CW Segment 26	0	255
27	LED Segment	CW Segment 27	0	255

390-Channel mode

Channel	Name	Function	Min DMX	Max DMX
28	LED Segment	CW Segment 28	0	255
29	LED Segment	CW Segment 29	0	255
30	LED Segment	CW Segment 30	0	255
31	LED Single	Red LED 1	0	255
32	LED Single	Green LED 1	0	255
33	LED Single	Blue LED 1	0	255
34	LED Single	Red LED 2	0	255
35	LED Single	Green LED 2	0	255
36	LED Single	Blue LED 2	0	255
37	LED Single	Red LED 3	0	255
38	LED Single	Green LED 3	0	255
39	LED Single	Blue LED 3	0	255
40	LED Single	Red LED 4	0	255
41	LED Single	Green LED 4	0	255
42	LED Single	Blue LED 4	0	255
43	LED Single	Red LED 5	0	255
44	LED Single	Green LED 5	0	255
45	LED Single	Blue LED 5	0	255
46	LED Single	Red LED 6	0	255
47	LED Single	Green LED 6	0	255
48	LED Single	Blue LED 6	0	255
49	LED Single	Red LED 7	0	255
50	LED Single	Green LED 7	0	255
51	LED Single	Blue LED 7	0	255
52	LED Single	Red LED 8	0	255
53	LED Single	Green LED 8	0	255
54	LED Single	Blue LED 8	0	255
55	LED Single	Red LED 9	0	255

390-Channel mode

Channel	Name	Function	Min DMX	Max DMX
56	LED Single	Green LED 9	0	255
57	LED Single	Blue LED 9	0	255
58	LED Single	Red LED 10	0	255
59	LED Single	Green LED 10	0	255
60	LED Single	Blue LED 10	0	255
61	LED Single	Red LED 11	0	255
62	LED Single	Green LED 11	0	255
63	LED Single	Blue LED 11	0	255
64	LED Single	Red LED 12	0	255
65	LED Single	Green LED 12	0	255
66	LED Single	Blue LED 12	0	255
67	LED Single	Red LED 13	0	255
68	LED Single	Green LED 13	0	255
69	LED Single	Blue LED 13	0	255
70	LED Single	Red LED 14	0	255
71	LED Single	Green LED 14	0	255
72	LED Single	Blue LED 14	0	255
73	LED Single	Red LED 15	0	255
74	LED Single	Green LED 15	0	255
75	LED Single	Blue LED 15	0	255
76	LED Single	Red LED 16	0	255
77	LED Single	Green LED 16	0	255
78	LED Single	Blue LED 16	0	255
79	LED Single	Red LED 17	0	255
80	LED Single	Green LED 17	0	255
81	LED Single	Blue LED 17	0	255
82	LED Single	Red LED 18	0	255
83	LED Single	Green LED 18	0	255

390-Channel mode

Channel	Name	Function	Min DMX	Max DMX
84	LED Single	Blue LED 18	0	255
85	LED Single	Red LED 19	0	255
86	LED Single	Green LED 19	0	255
87	LED Single	Blue LED 19	0	255
88	LED Single	Red LED 20	0	255
89	LED Single	Green LED 20	0	255
90	LED Single	Blue LED 20	0	255
91	LED Single	Red LED 21	0	255
92	LED Single	Green LED 21	0	255
93	LED Single	Blue LED 21	0	255
94	LED Single	Red LED 22	0	255
95	LED Single	Green LED 22	0	255
96	LED Single	Blue LED 22	0	255
97	LED Single	Red LED 23	0	255
98	LED Single	Green LED 23	0	255
99	LED Single	Blue LED 23	0	255
100	LED Single	Red LED 24	0	255
101	LED Single	Green LED 24	0	255
102	LED Single	Blue LED 24	0	255
103	LED Single	Red LED 25	0	255
104	LED Single	Green LED 25	0	255
105	LED Single	Blue LED 25	0	255
106	LED Single	Red LED 26	0	255
107	LED Single	Green LED 26	0	255
108	LED Single	Blue LED 26	0	255
109	LED Single	Red LED 27	0	255
110	LED Single	Green LED 27	0	255
111	LED Single	Blue LED 27	0	255

390-Channel mode

Channel	Name	Function	Min DMX	Max DMX
112	LED Single	Red LED 28	0	255
113	LED Single	Green LED 28	0	255
114	LED Single	Blue LED 28	0	255
115	LED Single	Red LED 29	0	255
116	LED Single	Green LED 29	0	255
117	LED Single	Blue LED 29	0	255
118	LED Single	Red LED 30	0	255
119	LED Single	Green LED 30	0	255
120	LED Single	Blue LED 30	0	255
121	LED Single	Red LED 31	0	255
122	LED Single	Green LED 31	0	255
123	LED Single	Blue LED 31	0	255
124	LED Single	Red LED 32	0	255
125	LED Single	Green LED 32	0	255
126	LED Single	Blue LED 32	0	255
127	LED Single	Red LED 33	0	255
128	LED Single	Green LED 33	0	255
129	LED Single	Blue LED 33	0	255
130	LED Single	Red LED 34	0	255
131	LED Single	Green LED 34	0	255
132	LED Single	Blue LED 34	0	255
133	LED Single	Red LED 35	0	255
134	LED Single	Green LED 35	0	255
135	LED Single	Blue LED 35	0	255
136	LED Single	Red LED 36	0	255
137	LED Single	Green LED 36	0	255

390-Channel mode

Channel	Name	Function	Min DMX	Max DMX
138	LED Single	Blue LED 36	0	255
139	LED Single	Red LED 37	0	255
140	LED Single	Green LED 37	0	255
141	LED Single	Blue LED 37	0	255
142	LED Single	Red LED 38	0	255
143	LED Single	Green LED 38	0	255
144	LED Single	Blue LED 38	0	255
145	LED Single	Red LED 39	0	255
146	LED Single	Green LED 39	0	255
147	LED Single	Blue LED 39	0	255
148	LED Single	Red LED 40	0	255
149	LED Single	Green LED 40	0	255
150	LED Single	Blue LED 40	0	255
151	LED Single	Red LED 41	0	255
152	LED Single	Green LED 41	0	255
153	LED Single	Blue LED 41	0	255
154	LED Single	Red LED 42	0	255
155	LED Single	Green LED 42	0	255
156	LED Single	Blue LED 42	0	255
157	LED Single	Red LED 43	0	255
158	LED Single	Green LED 43	0	255
159	LED Single	Blue LED 43	0	255
160	LED Single	Red LED 44	0	255
161	LED Single	Green LED 44	0	255
162	LED Single	Blue LED 44	0	255
163	LED Single	Red LED 45	0	255

390-Channel mode

Channel	Name	Function	Min DMX	Max DMX
164	LED Single	Green LED 45	0	255
165	LED Single	Blue LED 45	0	255
166	LED Single	Red LED 46	0	255
167	LED Single	Green LED 46	0	255
168	LED Single	Blue LED 46	0	255
169	LED Single	Red LED 47	0	255
170	LED Single	Green LED 47	0	255
171	LED Single	Blue LED 47	0	255
172	LED Single	Red LED 48	0	255
173	LED Single	Green LED 48	0	255
174	LED Single	Blue LED 48	0	255
175	LED Single	Red LED 49	0	255
176	LED Single	Green LED 49	0	255
177	LED Single	Blue LED 49	0	255
178	LED Single	Red LED 50	0	255
179	LED Single	Green LED 50	0	255
180	LED Single	Blue LED 50	0	255
181	LED Single	Red LED 51	0	255
182	LED Single	Green LED 51	0	255
183	LED Single	Blue LED 51	0	255
184	LED Single	Red LED 52	0	255
185	LED Single	Green LED 52	0	255
186	LED Single	Blue LED 52	0	255
187	LED Single	Red LED 53	0	255
188	LED Single	Green LED 53	0	255
189	LED Single	Blue LED 53	0	255

390-Channel mode

Channel	Name	Function	Min DMX	Max DMX
190	LED Single	Red LED 54	0	255
191	LED Single	Green LED 54	0	255
192	LED Single	Blue LED 54	0	255
193	LED Single	Red LED 55	0	255
194	LED Single	Green LED 55	0	255
195	LED Single	Blue LED 55	0	255
196	LED Single	Red LED 56	0	255
197	LED Single	Green LED 56	0	255
198	LED Single	Blue LED 56	0	255
199	LED Single	Red LED 57	0	255
200	LED Single	Green LED 57	0	255
201	LED Single	Blue LED 57	0	255
202	LED Single	Red LED 58	0	255
203	LED Single	Green LED 58	0	255
204	LED Single	Blue LED 58	0	255
205	LED Single	Red LED 59	0	255
206	LED Single	Green LED 59	0	255
207	LED Single	Blue LED 59	0	255
208	LED Single	Red LED 60	0	255
209	LED Single	Green LED 60	0	255
210	LED Single	Blue LED 60	0	255
211	LED Single	Red LED 61	0	255
212	LED Single	Green LED 61	0	255
213	LED Single	Blue LED 61	0	255
214	LED Single	Red LED 62	0	255
215	LED Single	Green LED 62	0	255
216	LED Single	Blue LED 62	0	255

390-Channel mode

Channel	Name	Function	Min DMX	Max DMX
217	LED Single	Red LED 63	0	255
218	LED Single	Green LED 63	0	255
219	LED Single	Blue LED 63	0	255
220	LED Single	Red LED 64	0	255
221	LED Single	Green LED 64	0	255
222	LED Single	Blue LED 64	0	255
223	LED Single	Red LED 65	0	255
224	LED Single	Green LED 65	0	255
225	LED Single	Blue LED 65	0	255
226	LED Single	Red LED 66	0	255
227	LED Single	Green LED 66	0	255
228	LED Single	Blue LED 66	0	255
229	LED Single	Red LED 67	0	255
230	LED Single	Green LED 67	0	255
231	LED Single	Blue LED 67	0	255
232	LED Single	Red LED 68	0	255
233	LED Single	Green LED 68	0	255
234	LED Single	Blue LED 68	0	255
235	LED Single	Red LED 69	0	255
236	LED Single	Green LED 69	0	255
237	LED Single	Blue LED 69	0	255
238	LED Single	Red LED 70	0	255
239	LED Single	Green LED 70	0	255
240	LED Single	Blue LED 70	0	255
241	LED Single	Red LED 71	0	255
242	LED Single	Green LED 71	0	255
243	LED Single	Blue LED 71	0	255

390-Channel mode

Channel	Name	Function	Min DMX	Max DMX
244	LED Single	Red LED 72	0	255
245	LED Single	Green LED 72	0	255
246	LED Single	Blue LED 72	0	255
247	LED Single	Red LED 73	0	255
248	LED Single	Green LED 73	0	255
249	LED Single	Blue LED 73	0	255
250	LED Single	Red LED 74	0	255
251	LED Single	Green LED 74	0	255
252	LED Single	Blue LED 74	0	255
253	LED Single	Red LED 75	0	255
254	LED Single	Green LED 75	0	255
255	LED Single	Blue LED 75	0	255
256	LED Single	Red LED 76	0	255
257	LED Single	Green LED 76	0	255
258	LED Single	Blue LED 76	0	255
259	LED Single	Red LED 77	0	255
260	LED Single	Green LED 77	0	255
261	LED Single	Blue LED 77	0	255
262	LED Single	Red LED 78	0	255
263	LED Single	Green LED 78	0	255
264	LED Single	Blue LED 78	0	255
265	LED Single	Red LED 79	0	255
266	LED Single	Green LED 79	0	255
267	LED Single	Blue LED 79	0	255
268	LED Single	Red LED 80	0	255
269	LED Single	Green LED 80	0	255
270	LED Single	Blue LED 80	0	255

390-Channel mode

Channel	Name	Function	Min DMX	Max DMX
271	LED Single	Red LED 81	0	255
272	LED Single	Green LED 81	0	255
273	LED Single	Blue LED 81	0	255
274	LED Single	Red LED 82	0	255
275	LED Single	Green LED 82	0	255
276	LED Single	Blue LED 82	0	255
277	LED Single	Red LED 83	0	255
278	LED Single	Green LED 83	0	255
279	LED Single	Blue LED 83	0	255
280	LED Single	Red LED 84	0	255
281	LED Single	Green LED 84	0	255
282	LED Single	Blue LED 84	0	255
283	LED Single	Red LED 85	0	255
284	LED Single	Green LED 85	0	255
285	LED Single	Blue LED 85	0	255
286	LED Single	Red LED 86	0	255
287	LED Single	Green LED 86	0	255
288	LED Single	Blue LED 86	0	255
289	LED Single	Red LED 87	0	255
290	LED Single	Green LED 87	0	255
291	LED Single	Blue LED 87	0	255
292	LED Single	Red LED 88	0	255
293	LED Single	Green LED 88	0	255
294	LED Single	Blue LED 88	0	255
295	LED Single	Red LED 89	0	255
296	LED Single	Green LED 89	0	255
297	LED Single	Blue LED 89	0	255

390-Channel mode

Channel	Name	Function	Min DMX	Max DMX
298	LED Single	Red LED 90	0	255
299	LED Single	Green LED 90	0	255
300	LED Single	Blue LED 90	0	255
301	LED Single	Red LED 91	0	255
302	LED Single	Green LED 91	0	255
303	LED Single	Blue LED 91	0	255
304	LED Single	Red LED 92	0	255
305	LED Single	Green LED 92	0	255
306	LED Single	Blue LED 92	0	255
307	LED Single	Red LED 93	0	255
308	LED Single	Green LED 93	0	255
309	LED Single	Blue LED 93	0	255
310	LED Single	Red LED 94	0	255
311	LED Single	Green LED 94	0	255
312	LED Single	Blue LED 94	0	255
313	LED Single	Red LED 95	0	255
314	LED Single	Green LED 95	0	255
315	LED Single	Blue LED 95	0	255
316	LED Single	Red LED 96	0	255
317	LED Single	Green LED 96	0	255
318	LED Single	Blue LED 96	0	255
319	LED Single	Red LED 97	0	255
320	LED Single	Green LED 97	0	255
321	LED Single	Blue LED 97	0	255
322	LED Single	Red LED 98	0	255
323	LED Single	Green LED 98	0	255
324	LED Single	Blue LED 98	0	255

390-Channel mode

Channel	Name	Function	Min DMX	Max DMX
325	LED Single	Red LED 99	0	255
326	LED Single	Green LED 99	0	255
327	LED Single	Blue LED 99	0	255
328	LED Single	Red LED 100	0	255
329	LED Single	Green LED 100	0	255
330	LED Single	Blue LED 100	0	255
331	LED Single	Red LED 101	0	255
332	LED Single	Green LED 101	0	255
333	LED Single	Blue LED 101	0	255
334	LED Single	Red LED 102	0	255
335	LED Single	Green LED 102	0	255
336	LED Single	Blue LED 102	0	255
337	LED Single	Red LED 103	0	255
338	LED Single	Green LED 103	0	255
339	LED Single	Blue LED 103	0	255
340	LED Single	Red LED 104	0	255
341	LED Single	Green LED 104	0	255
342	LED Single	Blue LED 104	0	255
343	LED Single	Red LED 105	0	255
344	LED Single	Green LED 105	0	255
345	LED Single	Blue LED 105	0	255
346	LED Single	Red LED 106	0	255
347	LED Single	Green LED 106	0	255
348	LED Single	Blue LED 106	0	255
349	LED Single	Red LED 107	0	255
350	LED Single	Green LED 107	0	255
351	LED Single	Blue LED 107	0	255

390-Channel mode

Channel	Name	Function	Min DMX	Max DMX
352	LED Single	Red LED 108	0	255
353	LED Single	Green LED 108	0	255
354	LED Single	Blue LED 108	0	255
355	LED Single	Red LED 109	0	255
356	LED Single	Green LED 109	0	255
357	LED Single	Blue LED 109	0	255
358	LED Single	Red LED 110	0	255
359	LED Single	Green LED 110	0	255
360	LED Single	Blue LED 110	0	255
361	LED Single	Red LED 111	0	255
362	LED Single	Green LED 111	0	255
363	LED Single	Blue LED 111	0	255
364	LED Single	Red LED 112	0	255
365	LED Single	Green LED 112	0	255
366	LED Single	Blue LED 112	0	255
367	LED Single	Red LED 113	0	255
368	LED Single	Green LED 113	0	255
369	LED Single	Blue LED 113	0	255
370	LED Single	Red LED 114	0	255
371	LED Single	Green LED 114	0	255
372	LED Single	Blue LED 114	0	255
373	LED Single	Red LED 115	0	255
374	LED Single	Green LED 115	0	255
375	LED Single	Blue LED 115	0	255
376	LED Single	Red LED 116	0	255
377	LED Single	Green LED 116	0	255
378	LED Single	Blue LED 116	0	255

390-Channel mode

Channel	Name	Function	Min DMX	Max DMX
379	LED Single	Red LED 117	0	255
380	LED Single	Green LED 117	0	255
381	LED Single	Blue LED 117	0	255
382	LED Single	Red LED 118	0	255
383	LED Single	Green LED 118	0	255
384	LED Single	Blue LED 118	0	255
385	LED Single	Red LED 119	0	255
386	LED Single	Green LED 119	0	255
387	LED Single	Blue LED 119	0	255
388	LED Single	Red LED 120	0	255
389	LED Single	Green LED 120	0	255
390	LED Single	Blue LED 120	0	255

400-Channel mode

Channel	Name	Function	Min DMX	Max DMX
1	Dimmer	Coarse Dimmer	0	255
2	Strobe CW	No Function	0	5
		Sync. Strobe	6	55
		Pulse Strobe	56	105
		Random Strobe	106	155
		Gradual fade in (Fast-Slow)	156	205
		Gradual fade out (Fast-Slow)	206	255
3	Strobe RGB	No Function	0	5
		Sync. Strobe	6	55
		Pulse Strobe	56	105
		Random Strobe	106	155
		Gradual fade in (Fast-Slow)	156	205
		Gradual fade out (Fast-Slow)	206	255
4	Red	Red 0-100%	0	255
5	Green	Green 0-100%	0	255
6	Blue	Blue 0-100%	0	255
7	Dimmer	Dimmer CW LEDS	0	255
8	RGB Macros	RGB Macro 1	0	15
		RGB Macro 2	16	30
		RGB Macro 3	31	45
		RGB Macro 4	46	60
		RGB Macro 5	61	75
		RGB Macro 6	76	90
		RGB Macro 7	91	105
		RGB Macro 8	106	120

400-Channel mode

Channel	Name	Function	Min DMX	Max DMX
8	RGB Macros	RGB Macro 9	121	135
		RGB Macro 10	136	150
		RGB Macro 11	151	165
		RGB Macro 12	166	180
		RGB Macro 13	181	195
		RGB Macro 14	196	210
		RGB Macro 15	211	225
		RGB Macro 16	226	240
		RGB Macro 17	241	255
		9	CW Macros	CW Macro 1
CW Macro 2	16			30
CW Macro 3	31			45
CW Macro 4	46			60
CW Macro 5	61			75
CW Macro 6	76			90
CW Macro 7	91			105
CW Macro 8	106			120
CW Macro 9	121			135
CW Macro 10	136			150
CW Macro 11	151			165
CW Macro 12	166			180
CW Macro 13	181			195
CW Macro 14	196			210
CW Macro 15	211			225
CW Macro 16	226			240
CW Macro 17	241			255
10	Macro Speed	Slow - Fast	0	255

400-Channel mode

Channel	Name	Function	Min DMX	Max DMX
11	LED Segment	CW Segment 1	0	255
12	LED Segment	CW Segment 2	0	255
13	LED Segment	CW Segment 3	0	255
14	LED Segment	CW Segment 4	0	255
15	LED Segment	CW Segment 5	0	255
16	LED Segment	CW Segment 6	0	255
17	LED Segment	CW Segment 7	0	255
18	LED Segment	CW Segment 8	0	255
19	LED Segment	CW Segment 9	0	255
20	LED Segment	CW Segment 10	0	255
21	LED Segment	CW Segment 11	0	255
22	LED Segment	CW Segment 12	0	255
23	LED Segment	CW Segment 13	0	255
24	LED Segment	CW Segment 14	0	255
25	LED Segment	CW Segment 15	0	255
26	LED Segment	CW Segment 16	0	255
27	LED Segment	CW Segment 17	0	255
28	LED Segment	CW Segment 18	0	255
29	LED Segment	CW Segment 19	0	255
30	LED Segment	CW Segment 20	0	255
31	LED Segment	CW Segment 21	0	255
32	LED Segment	CW Segment 22	0	255
33	LED Segment	CW Segment 23	0	255
34	LED Segment	CW Segment 24	0	255
35	LED Segment	CW Segment 25	0	255
36	LED Segment	CW Segment 26	0	255
37	LED Segment	CW Segment 27	0	255

400-Channel mode

Channel	Name	Function	Min DMX	Max DMX
38	LED Segment	CW Segment 28	0	255
39	LED Segment	CW Segment 29	0	255
40	LED Segment	CW Segment 30	0	255
41	LED Single	Red LED 1	0	255
42	LED Single	Green LED 1	0	255
43	LED Single	Blue LED 1	0	255
44	LED Single	Red LED 2	0	255
45	LED Single	Green LED 2	0	255
46	LED Single	Blue LED 2	0	255
47	LED Single	Red LED 3	0	255
48	LED Single	Green LED 3	0	255
49	LED Single	Blue LED 3	0	255
50	LED Single	Red LED 4	0	255
51	LED Single	Green LED 4	0	255
52	LED Single	Blue LED 4	0	255
53	LED Single	Red LED 5	0	255
54	LED Single	Green LED 5	0	255
55	LED Single	Blue LED 5	0	255
56	LED Single	Red LED 6	0	255
57	LED Single	Green LED 6	0	255
58	LED Single	Blue LED 6	0	255
59	LED Single	Red LED 7	0	255
60	LED Single	Green LED 7	0	255
61	LED Single	Blue LED 7	0	255
62	LED Single	Red LED 8	0	255
63	LED Single	Green LED 8	0	255
64	LED Single	Blue LED 8	0	255
65	LED Single	Red LED 9	0	255

400-Channel mode

Channel	Name	Function	Min DMX	Max DMX
66	LED Single	Green LED 9	0	255
67	LED Single	Blue LED 9	0	255
68	LED Single	Red LED 10	0	255
69	LED Single	Green LED 10	0	255
70	LED Single	Blue LED 10	0	255
71	LED Single	Red LED 11	0	255
72	LED Single	Green LED 11	0	255
73	LED Single	Blue LED 11	0	255
74	LED Single	Red LED 12	0	255
75	LED Single	Green LED 12	0	255
76	LED Single	Blue LED 12	0	255
77	LED Single	Red LED 13	0	255
78	LED Single	Green LED 13	0	255
79	LED Single	Blue LED 13	0	255
80	LED Single	Red LED 14	0	255
81	LED Single	Green LED 14	0	255
82	LED Single	Blue LED 14	0	255
83	LED Single	Red LED 15	0	255
84	LED Single	Green LED 15	0	255
85	LED Single	Blue LED 15	0	255
86	LED Single	Red LED 16	0	255
87	LED Single	Green LED 16	0	255
88	LED Single	Blue LED 16	0	255
89	LED Single	Red LED 17	0	255
90	LED Single	Green LED 17	0	255
91	LED Single	Blue LED 17	0	255
92	LED Single	Red LED 18	0	255
93	LED Single	Green LED 18	0	255

400-Channel mode

Channel	Name	Function	Min DMX	Max DMX
94	LED Single	Blue LED 18	0	255
95	LED Single	Red LED 19	0	255
96	LED Single	Green LED 19	0	255
97	LED Single	Blue LED 19	0	255
98	LED Single	Red LED 20	0	255
99	LED Single	Green LED 20	0	255
100	LED Single	Blue LED 20	0	255
101	LED Single	Red LED 21	0	255
102	LED Single	Green LED 21	0	255
103	LED Single	Blue LED 21	0	255
104	LED Single	Red LED 22	0	255
105	LED Single	Green LED 22	0	255
106	LED Single	Blue LED 22	0	255
107	LED Single	Red LED 23	0	255
108	LED Single	Green LED 23	0	255
109	LED Single	Blue LED 23	0	255
110	LED Single	Red LED 24	0	255
111	LED Single	Green LED 24	0	255
112	LED Single	Blue LED 24	0	255
113	LED Single	Red LED 25	0	255
114	LED Single	Green LED 25	0	255
115	LED Single	Blue LED 25	0	255
116	LED Single	Red LED 26	0	255
117	LED Single	Green LED 26	0	255
118	LED Single	Blue LED 26	0	255
119	LED Single	Red LED 27	0	255
120	LED Single	Green LED 27	0	255
121	LED Single	Blue LED 27	0	255

400-Channel mode

Channel	Name	Function	Min DMX	Max DMX
122	LED Single	Red LED 28	0	255
123	LED Single	Green LED 28	0	255
124	LED Single	Blue LED 28	0	255
125	LED Single	Red LED 29	0	255
126	LED Single	Green LED 29	0	255
127	LED Single	Blue LED 29	0	255
128	LED Single	Red LED 30	0	255
129	LED Single	Green LED 30	0	255
130	LED Single	Blue LED 30	0	255
131	LED Single	Red LED 31	0	255
132	LED Single	Green LED 31	0	255
133	LED Single	Blue LED 31	0	255
134	LED Single	Red LED 32	0	255
135	LED Single	Green LED 32	0	255
136	LED Single	Blue LED 32	0	255
137	LED Single	Red LED 33	0	255
138	LED Single	Green LED 33	0	255
139	LED Single	Blue LED 33	0	255
140	LED Single	Red LED 34	0	255
141	LED Single	Green LED 34	0	255
142	LED Single	Blue LED 34	0	255
143	LED Single	Red LED 35	0	255
144	LED Single	Green LED 35	0	255
145	LED Single	Blue LED 35	0	255
146	LED Single	Red LED 36	0	255
147	LED Single	Green LED 36	0	255
148	LED Single	Blue LED 36	0	255
149	LED Single	Red LED 37	0	255

400-Channel mode

Channel	Name	Function	Min DMX	Max DMX
150	LED Single	Green LED 37	0	255
151	LED Single	Blue LED 37	0	255
152	LED Single	Red LED 38	0	255
153	LED Single	Green LED 38	0	255
154	LED Single	Blue LED 38	0	255
155	LED Single	Red LED 39	0	255
156	LED Single	Green LED 39	0	255
157	LED Single	Blue LED 39	0	255
158	LED Single	Red LED 40	0	255
159	LED Single	Green LED 40	0	255
160	LED Single	Blue LED 40	0	255
161	LED Single	Red LED 41	0	255
162	LED Single	Green LED 41	0	255
163	LED Single	Blue LED 41	0	255
164	LED Single	Red LED 42	0	255
165	LED Single	Green LED 42	0	255
166	LED Single	Blue LED 42	0	255
167	LED Single	Red LED 43	0	255
168	LED Single	Green LED 43	0	255
169	LED Single	Blue LED 43	0	255
170	LED Single	Red LED 44	0	255
171	LED Single	Green LED 44	0	255
172	LED Single	Blue LED 44	0	255
173	LED Single	Red LED 45	0	255
174	LED Single	Green LED 45	0	255
175	LED Single	Blue LED 45	0	255
176	LED Single	Red LED 46	0	255
177	LED Single	Green LED 46	0	255

400-Channel mode

Channel	Name	Function	Min DMX	Max DMX
178	LED Single	Blue LED 46	0	255
179	LED Single	Red LED 47	0	255
180	LED Single	Green LED 47	0	255
181	LED Single	Blue LED 47	0	255
182	LED Single	Red LED 48	0	255
183	LED Single	Green LED 48	0	255
184	LED Single	Blue LED 48	0	255
185	LED Single	Red LED 49	0	255
186	LED Single	Green LED 49	0	255
187	LED Single	Blue LED 49	0	255
188	LED Single	Red LED 50	0	255
189	LED Single	Green LED 50	0	255
190	LED Single	Blue LED 50	0	255
191	LED Single	Red LED 51	0	255
192	LED Single	Green LED 51	0	255
193	LED Single	Blue LED 51	0	255
194	LED Single	Red LED 52	0	255
195	LED Single	Green LED 52	0	255
196	LED Single	Blue LED 52	0	255
197	LED Single	Red LED 53	0	255
198	LED Single	Green LED 53	0	255
199	LED Single	Blue LED 53	0	255
200	LED Single	Red LED 54	0	255
201	LED Single	Green LED 54	0	255
202	LED Single	Blue LED 54	0	255
203	LED Single	Red LED 55	0	255
204	LED Single	Green LED 55	0	255
205	LED Single	Blue LED 55	0	255

400-Channel mode

Channel	Name	Function	Min DMX	Max DMX
206	LED Single	Red LED 56	0	255
207	LED Single	Green LED 56	0	255
208	LED Single	Blue LED 56	0	255
209	LED Single	Red LED 57	0	255
210	LED Single	Green LED 57	0	255
211	LED Single	Blue LED 57	0	255
212	LED Single	Red LED 58	0	255
213	LED Single	Green LED 58	0	255
214	LED Single	Blue LED 58	0	255
215	LED Single	Red LED 59	0	255
216	LED Single	Green LED 59	0	255
217	LED Single	Blue LED 59	0	255
218	LED Single	Red LED 60	0	255
219	LED Single	Green LED 60	0	255
220	LED Single	Blue LED 60	0	255
221	LED Single	Red LED 61	0	255
222	LED Single	Green LED 61	0	255
223	LED Single	Blue LED 61	0	255
224	LED Single	Red LED 62	0	255
225	LED Single	Green LED 62	0	255
226	LED Single	Blue LED 62	0	255
227	LED Single	Red LED 63	0	255
228	LED Single	Green LED 63	0	255
229	LED Single	Blue LED 63	0	255
230	LED Single	Red LED 64	0	255
231	LED Single	Green LED 64	0	255
232	LED Single	Blue LED 64	0	255
233	LED Single	Red LED 65	0	255

400-Channel mode

Channel	Name	Function	Min DMX	Max DMX
234	LED Single	Green LED 65	0	255
235	LED Single	Blue LED 65	0	255
236	LED Single	Red LED 66	0	255
237	LED Single	Green LED 66	0	255
238	LED Single	Blue LED 66	0	255
239	LED Single	Red LED 67	0	255
240	LED Single	Green LED 67	0	255
241	LED Single	Blue LED 67	0	255
242	LED Single	Red LED 68	0	255
243	LED Single	Green LED 68	0	255
244	LED Single	Blue LED 68	0	255
245	LED Single	Red LED 69	0	255
246	LED Single	Green LED 69	0	255
247	LED Single	Blue LED 69	0	255
248	LED Single	Red LED 70	0	255
249	LED Single	Green LED 70	0	255
250	LED Single	Blue LED 70	0	255
251	LED Single	Red LED 71	0	255
252	LED Single	Green LED 71	0	255
253	LED Single	Blue LED 71	0	255
254	LED Single	Red LED 72	0	255
255	LED Single	Green LED 72	0	255
256	LED Single	Blue LED 72	0	255
257	LED Single	Red LED 73	0	255
258	LED Single	Green LED 73	0	255
259	LED Single	Blue LED 73	0	255
260	LED Single	Red LED 74	0	255
261	LED Single	Green LED 74	0	255

400-Channel mode

Channel	Name	Function	Min DMX	Max DMX
262	LED Single	Blue LED 74	0	255
263	LED Single	Red LED 75	0	255
264	LED Single	Green LED 75	0	255
265	LED Single	Blue LED 75	0	255
266	LED Single	Red LED 76	0	255
267	LED Single	Green LED 76	0	255
268	LED Single	Blue LED 76	0	255
269	LED Single	Red LED 77	0	255
270	LED Single	Green LED 77	0	255
271	LED Single	Blue LED 77	0	255
272	LED Single	Red LED 78	0	255
273	LED Single	Green LED 78	0	255
274	LED Single	Blue LED 78	0	255
275	LED Single	Red LED 79	0	255
276	LED Single	Green LED 79	0	255
277	LED Single	Blue LED 79	0	255
278	LED Single	Red LED 80	0	255
279	LED Single	Green LED 80	0	255
280	LED Single	Blue LED 80	0	255
281	LED Single	Red LED 81	0	255
282	LED Single	Green LED 81	0	255
283	LED Single	Blue LED 81	0	255
284	LED Single	Red LED 82	0	255
285	LED Single	Green LED 82	0	255
286	LED Single	Blue LED 82	0	255
287	LED Single	Red LED 83	0	255
288	LED Single	Green LED 83	0	255
289	LED Single	Blue LED 83	0	255

400-Channel mode

Channel	Name	Function	Min DMX	Max DMX
290	LED Single	Red LED 84	0	255
291	LED Single	Green LED 84	0	255
292	LED Single	Blue LED 84	0	255
293	LED Single	Red LED 85	0	255
294	LED Single	Green LED 85	0	255
295	LED Single	Blue LED 85	0	255
296	LED Single	Red LED 86	0	255
297	LED Single	Green LED 86	0	255
298	LED Single	Blue LED 86	0	255
299	LED Single	Red LED 87	0	255
300	LED Single	Green LED 87	0	255
301	LED Single	Blue LED 87	0	255
302	LED Single	Red LED 88	0	255
303	LED Single	Green LED 88	0	255
304	LED Single	Blue LED 88	0	255
305	LED Single	Red LED 89	0	255
306	LED Single	Green LED 89	0	255
307	LED Single	Blue LED 89	0	255
308	LED Single	Red LED 90	0	255
309	LED Single	Green LED 90	0	255
310	LED Single	Blue LED 90	0	255
311	LED Single	Red LED 91	0	255
312	LED Single	Green LED 91	0	255
313	LED Single	Blue LED 91	0	255
314	LED Single	Red LED 92	0	255
315	LED Single	Green LED 92	0	255
316	LED Single	Blue LED 92	0	255
317	LED Single	Red LED 93	0	255

400-Channel mode

Channel	Name	Function	Min DMX	Max DMX
318	LED Single	Green LED 93	0	255
319	LED Single	Blue LED 93	0	255
320	LED Single	Red LED 94	0	255
321	LED Single	Green LED 94	0	255
322	LED Single	Blue LED 94	0	255
323	LED Single	Red LED 95	0	255
324	LED Single	Green LED 95	0	255
325	LED Single	Blue LED 95	0	255
326	LED Single	Red LED 96	0	255
327	LED Single	Green LED 96	0	255
328	LED Single	Blue LED 96	0	255
329	LED Single	Red LED 97	0	255
330	LED Single	Green LED 97	0	255
331	LED Single	Blue LED 97	0	255
332	LED Single	Red LED 98	0	255
333	LED Single	Green LED 98	0	255
334	LED Single	Blue LED 98	0	255
335	LED Single	Red LED 99	0	255
336	LED Single	Green LED 99	0	255
337	LED Single	Blue LED 99	0	255
338	LED Single	Red LED 100	0	255
339	LED Single	Green LED 100	0	255
340	LED Single	Blue LED 100	0	255
341	LED Single	Red LED 101	0	255
342	LED Single	Green LED 101	0	255
343	LED Single	Blue LED 101	0	255
344	LED Single	Red LED 102	0	255
345	LED Single	Green LED 102	0	255

400-Channel mode

Channel	Name	Function	Min DMX	Max DMX
346	LED Single	Blue LED 102	0	255
347	LED Single	Red LED 103	0	255
348	LED Single	Green LED 103	0	255
349	LED Single	Blue LED 103	0	255
350	LED Single	Red LED 104	0	255
351	LED Single	Green LED 104	0	255
352	LED Single	Blue LED 104	0	255
353	LED Single	Red LED 105	0	255
354	LED Single	Green LED 105	0	255
355	LED Single	Blue LED 105	0	255
356	LED Single	Red LED 106	0	255
357	LED Single	Green LED 106	0	255
358	LED Single	Blue LED 106	0	255
359	LED Single	Red LED 107	0	255
360	LED Single	Green LED 107	0	255
361	LED Single	Blue LED 107	0	255
362	LED Single	Red LED 108	0	255
363	LED Single	Green LED 108	0	255
364	LED Single	Blue LED 108	0	255
365	LED Single	Red LED 109	0	255
366	LED Single	Green LED 109	0	255
367	LED Single	Blue LED 109	0	255
368	LED Single	Red LED 110	0	255
369	LED Single	Green LED 110	0	255
370	LED Single	Blue LED 110	0	255
371	LED Single	Red LED 111	0	255
372	LED Single	Green LED 111	0	255
373	LED Single	Blue LED 111	0	255

400-Channel mode

Channel	Name	Function	Min DMX	Max DMX
374	LED Single	Red LED 112	0	255
375	LED Single	Green LED 112	0	255
376	LED Single	Blue LED 112	0	255
377	LED Single	Red LED 113	0	255
378	LED Single	Green LED 113	0	255
379	LED Single	Blue LED 113	0	255
380	LED Single	Red LED 114	0	255
381	LED Single	Green LED 114	0	255
382	LED Single	Blue LED 114	0	255
383	LED Single	Red LED 115	0	255
384	LED Single	Green LED 115	0	255
385	LED Single	Blue LED 115	0	255
386	LED Single	Red LED 116	0	255
387	LED Single	Green LED 116	0	255
388	LED Single	Blue LED 116	0	255
389	LED Single	Red LED 117	0	255
390	LED Single	Green LED 117	0	255
391	LED Single	Blue LED 117	0	255
392	LED Single	Red LED 118	0	255
393	LED Single	Green LED 118	0	255
394	LED Single	Blue LED 118	0	255
395	LED Single	Red LED 119	0	255
396	LED Single	Green LED 119	0	255
397	LED Single	Blue LED 119	0	255
398	LED Single	Red LED 120	0	255
399	LED Single	Green LED 120	0	255
400	LED Single	Blue LED 120	0	255