




The **B Expo350CW** offers an even higher output than the B Expo200WW with a 5.600°K colour temperature in an automated version. You can control pan, tilt, zoom, dimming via DMX, as well as via a unique remote control. This remote control enables you to control each individual fixtures via a combination of light and IR. The pan and tilt is controlled via worm wheels for accurate positioning. This results in a unique high power and high quality fresnel light. It has the ability to work over long distances in terms of light output and control capability. These features will make the B Expo350CW a new standard in the high-end exhibition market. ■

Physical

Dimensions (WxHxD)	14.3 x 18.4 x 12.6 in
	362 x 468 x 320 mm
Packing dimensions (WxHxD)	17.3 x 20,1 x 15.2 in
	440 x 510 x 385 mm
Nett weight	26.2 lbs
	11,9 kg
Gross weight	28.4 lbs
	12,9 kg

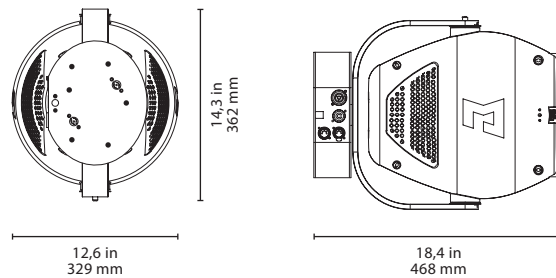

Mounting options

Hanging	1x Omega bracket with 2x 1/4 turn quick lock fastner, 2x M12 holes in base
Standing	n/a
2nd suspension / safety wire	1x sleeve in base of unit to pass carabiner

Control

Menu control	TFT display with 4x buttons	In/Link	XLR 5 pin
Control	DMX512, remote operated	DMX mode	8/9 channels
Dimmer mode	16-bit dimming	Automated zoom	
Movement	max pan 150° max tilt 150°		

Electrical

Fixture rated power	320W	Input power	100 - 240V ~ 50/60Hz - Auto switching power supply
LED engine	350W 5600°K	In/Link	PowerCON TRUE1 - max link current 10A

Bedrijvenpark De Veert 13/004 B-2830 Willebroek Belgium




www.luxibel.com

All specifications are subjected to change without prior notice.

Optical


Beam angle	15°-45°
Light output RGBW 15°	5400 lux @ 5m 1480 lux @ 10m 834 lux @ 15m
Light output RGBW 45°	975 lux @ 5m 369 lux @ 10m 202 lux @ 15m
Colours	5600°K
Refresh rate	Adaptable 600Hz - 4000 Hz
Strobe	0-20 Hz
CRI	93.9 CRI

Photometrics Diagram

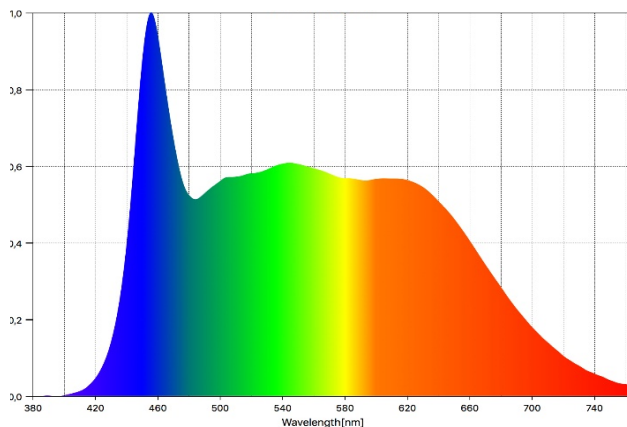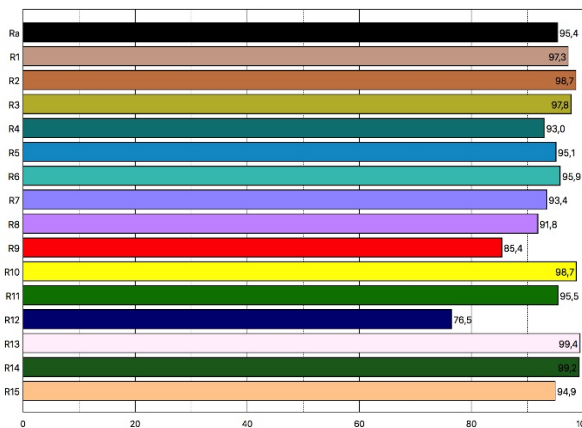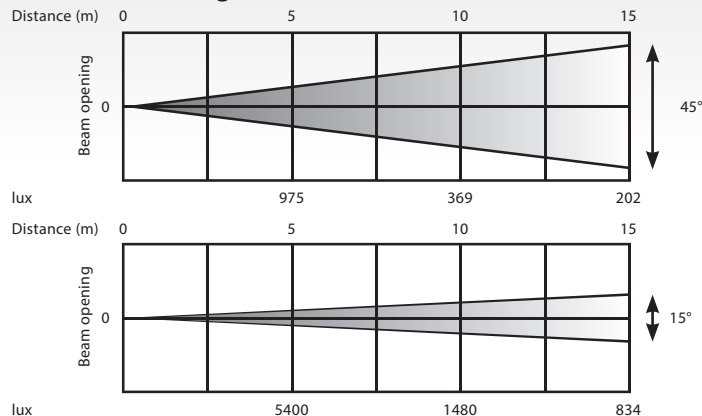

Connectivity

- 1 TFT display & menu control buttons
- 2 DMX input
- 3 DMX output
- 4 Power input
- 5 Power output
- 6 Remote sensors

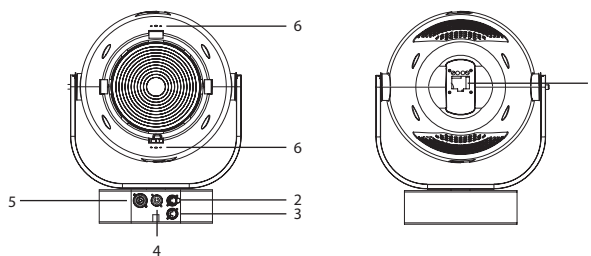

Accessories

Included

1x Powercable

Optional

6-leaf barndoor

Remote controller

Environmental

IP Rating

IP20

Cooling

Heat pipe + air cooling

Certification

TÜV SÜD GS CE

TÜV SÜD US

Patents pending

Bedrijvenpark De Veert 13/004 B-2830 Willebroek Belgium

www.luxibel.com

All specifications are subjected to change without prior notice.