




The **B Expo350A** offers an even higher output than the B Expo200M with a 5.600° K or 3000°K colour temperature in an automated version. You can control pan, tilt, zoom, dimming via DMX, as well as via a unique remote control. This remote control enables you to control each individual fixture via a combination of light and IR. This results in a unique way to control your light. It has the ability to work over long distances in terms of light output and control capability. These features will make the B Expo350A a new standard in the high-end exhibition market. ■

### Physical

Dimensions (WxHxD)	14.3 x 18.8 x 12.6 in 362 x 468 x 320 mm
Packing dimensions (WxHxD)	17.3 x 20.1 x 15.2 in 439 x 511 x 386 mm
Nett weight	24.25 lbs 11 kg
Gross weight	26.45 lbs 12 kg

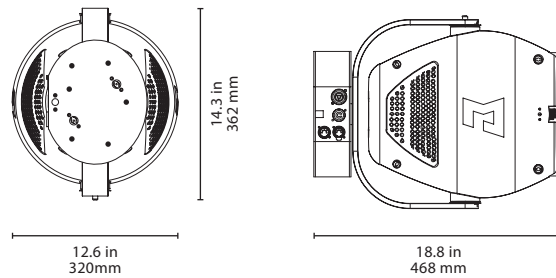

### Mounting options

Hanging	1x Omega bracket with 2x 1/4 turn quick lock fastner, 2x M12 holes in base
Standing	n/a
2nd suspension / safety wire	1x sleeve in base of unit to pass carabiner

### Control

Menu control	TFT display with 4x buttons	In/Link	XLR 5 pin
Control	DMX/RDM, remote operated, manual	DMX mode	8/9 channels
Dimmer mode	16-bit dimming	Automated zoom	15° - 45°
Movement	max pan 150° max tilt 150°		






### Electrical

Fixture rated power	360W	Input power	100 - 240V ~ 50/60Hz - Auto switching power supply
LED engine	350W 5600K or 3000K	In/Link	PowerCON TRUE1 - max link current 10A

## Optical


Beam angle	15°-45°
Light output RGBW 15°	5400 lux @ 5m 1480 lux @ 10m 834 lux @ 15m
Light output RGBW 45°	975 lux @ 5m 369 lux @ 10m 202 lux @ 15m
Colours	5600K or 3000K
Refresh rate	Adaptable 600Hz - 4000 Hz
Strobe	0-20 Hz
CRI	95,4 CRI (CW) or 97,8 CRI (WW)

## Photometrics Diagram

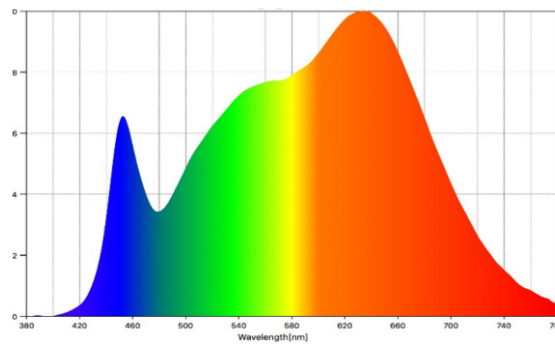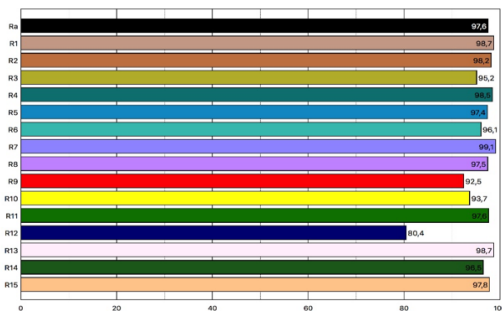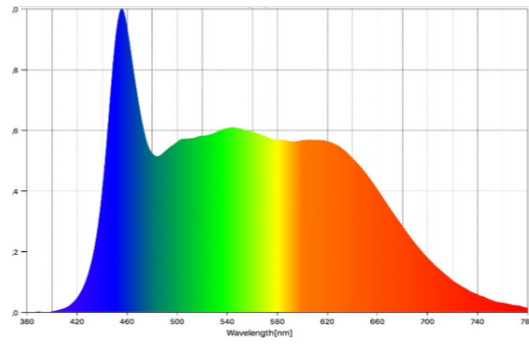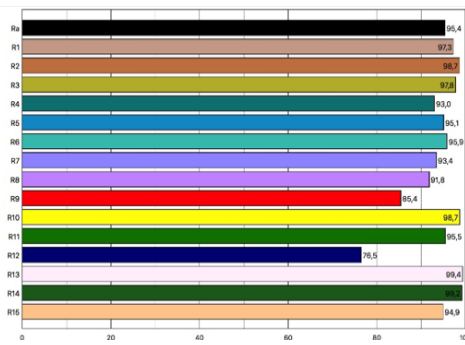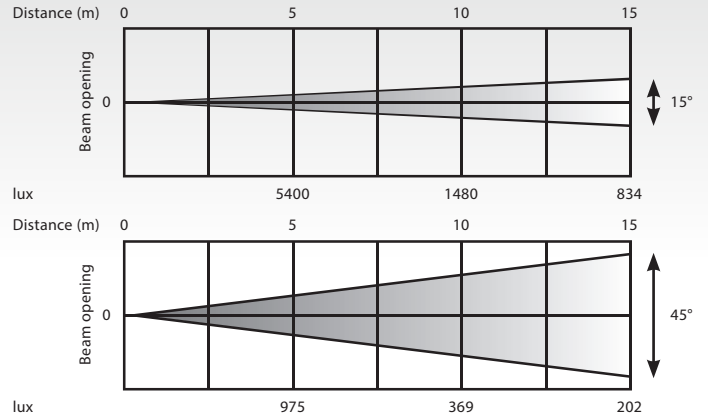

## Connectivity

- 1 TFT display & menu control buttons
- 2 DMX input
- 3 DMX output
- 4 Power input
- 5 Power output
- 6 Remote sensors

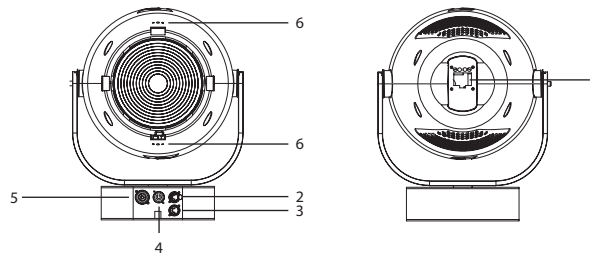

## Accessories

### Included

- 1x Powercable

### Optional

- Barndoor, Remote, Filter frame, Colour upgrade kit

## Environmental

IP Rating

IP20

Cooling

Heat pipe + air cooling