


B EXPOFLOODDL60°

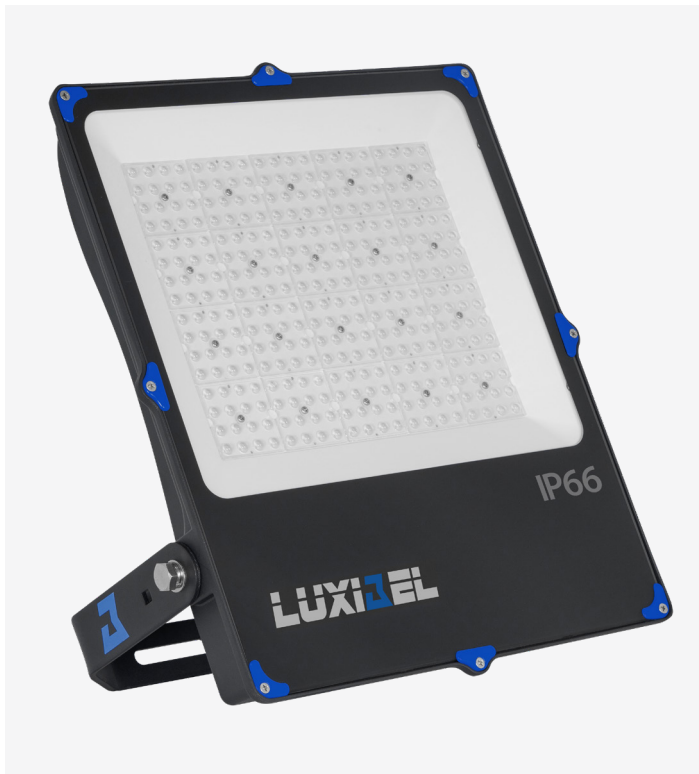

High CRI IP66 flood light

The B ExpoFloodDL60° is an IP66 flood light in high CRI. A very slim design for transport and installation, high-quality power supply and LED, these are some of the features that make this the ultimate light to use on a daily basis. You can use this to light up exhibitions, festivals, venues, everywhere a high-quality wash light is needed. ■

Main features

- No fans, no noise
- High CRI 95
- Special optics
- 60° angle
- One hand locking
- Power cable in & out
- Extremely high and stable output

Accessories

- Powercable with bare ends

Certifications

- TÜV Rheinland
- CE & US certified

Optical

Lamp type	LED fresnel
Beam angle	60°
Colours	4.800K
Refresh rate	Flicker free
CRI	95 Ra

Physical

Dimensions (WxHxD)	497 x 416 x 63 mm 19.6 x 16.4 x 2.5 in
Packing dimensions (WxHxD)	540 x 420 x 115 mm 21.3 x 16.5 x 4.5 in
Net weight	6,4 kg 14.1 lbs
Gross weight	7,2 kg 15.9 lbs
Cooling	Conventional, no fans

Mounting

Hanging	3x m12 hole
2nd suspension/safety wire	1x eye in back of the unit to pass carabiner

Control

Control	On/off by power
Movement	One hand tilt locking

Electrical

Fixture rated power	220W
LED engine	320x 1W SMD LED
Input power	240V ~ 50Hz Auto switching power supply
In/Link	1,5m cable bare ends (choose your plug) max link current: 10A
IP rating	IP66



Photometric data

