





B 5

DMX Chart

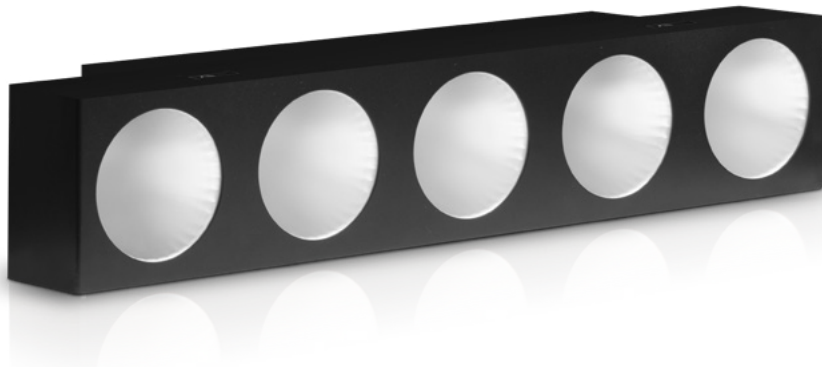

4 DMX modes

- 1-Channel mode
- 4-Channel mode
- 7-Channel mode
- 20-Channel mode

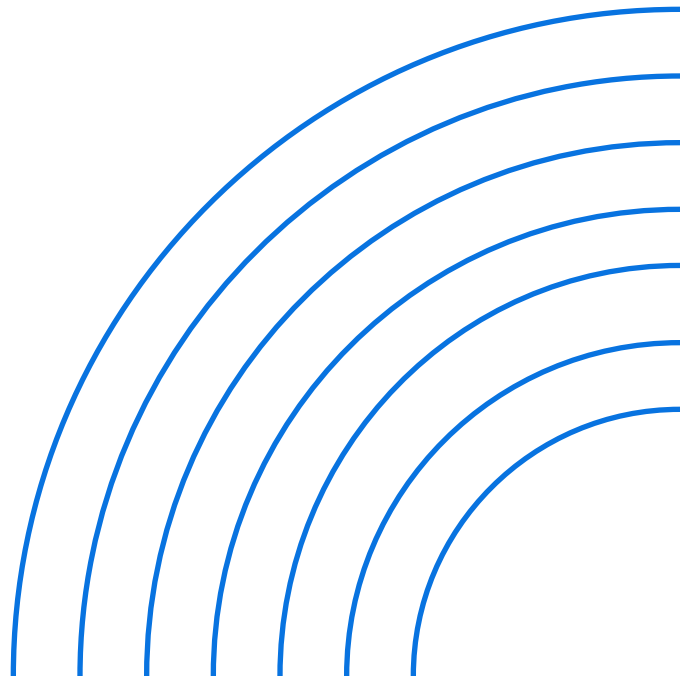

1-Channel mode

Channel	Name	Function	Min DMX	Max DMX
1	Show Macro (all affected by sound, except in NO function)	No Function	0	7
		Show 1	8	22
		Show 2	23	37
		Show 3	38	52
		Show 4	53	67
		Show 5	68	82
		Show 6	83	97
		Show 7	98	112
		Show 8	113	127
		Show 9	128	142
		Show 10	143	157
		Show 11	158	172
		Show 12	173	187
		Show 13	188	202
		Show 14	203	217
		Show 15	218	232
		Show 16	233	247
		Sound active, the static to performance	248	255

4-Channel mode

Channel	Name	Function	Min DMX	Max DMX
1	Red	Red 0-100%	0	255
2	Green	Green 0-100%	0	255
3	Blue	Blue 0-100%	0	255
4	Amber	Amber 0-100%	0	255

7-Channel mode

Channel	Name	Function	Min DMX	Max DMX
1	Colour	First light (Red towards white over the spectrum)	0	255
2	Colour	Second Light (Red towards white over the spectrum)	0	255
3	Colour	Third Light (Red towards white over the spectrum)	0	255
4	Colour	Fourth Light (Red towards white over the spectrum)	0	255
5	Colour	Fifth Light (Red towards white over the spectrum)	0	255
6	Dimmer	Dimmer (All)	0	255
7	Strobe	Channel switch / strobe / Fade (dark to bright)	0	250
		Open	251	255

7-Channel mode

Channel	Name	Function	Min DMX	Max DMX
1	Colour	First light (Red towards white over the spectrum)	0	255
2	Colour	Second Light (Red towards white over the spectrum)	0	255
3	Colour	Third Light (Red towards white over the spectrum)	0	255
4	Colour	Fourth Light (Red towards white over the spectrum)	0	255
5	Colour	Fifth Light (Red towards white over the spectrum)	0	255
6	Dimmer	Dimmer (All)	0	255
7	Strobe	Channel switch / strobe / Fade (dark to bright)	0	250
		Open	251	255

20-Channel mode

Channel	Name	Function	Min DMX	Max DMX
1	Red1	Red 0-100% First LED	0	255
2	Green1	Green 0-100% First LED	0	255
3	Blue1	Blue 0-100% First LED	0	255
4	Amber1	Amber 0-100% First LED	0	255
5	Red2	Red 0-100% Second LED	0	255
6	Green2	Green 0-100% Second LED	0	255
7	Blue2	Blue 0-100% Second LED	0	255
8	Amber2	Amber 0-100% Second LED	0	255
9	Red3	Red 0-100% Third LED	0	255
10	Green3	Green 0-100% Third LED	0	255
11	Blue3	Blue 0-100% Third LED	0	255
12	Amber3	Amber 0-100% Third LED	0	255
13	Red4	Red 0-100% Fourth LED	0	255
14	Green4	Green 0-100% Fourth LED	0	255
15	Blue4	Blue 0-100% Fourth LED	0	255
16	Amber4	Amber 0-100% Fourth LED	0	255
17	Red5	Red 0-100% Fifth LED	0	255
18	Green5	Green 0-100% Fifth LED	0	255
19	Blue5	Blue 0-100% Fifth LED	0	255
20	Amber5	Amber 0-100% Fifth LED	0	255